


Artificial Intelligence detection for Grain Size



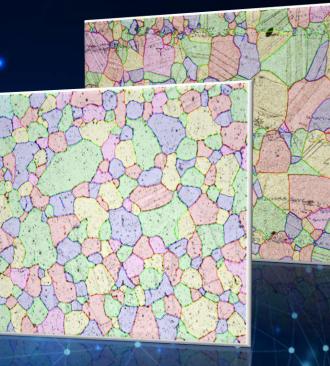

Discover more about One-click solutions using Artificial Intelligence

Aluminium Austenite Brass

Elements

Automatic Segmentation

Artificial Intelligence (AI) and deep learning make the segmentation absolutely effortless. Segmenting grains using manual thresholding can be very tricky and tedious – this is now past.

One-click detection

Automatic and complete image segmentation without complicated workflows is provided by just one-click using AI in NIS-Elements.




Sample type flexibility

Al network can recognize grains on wide variety of images as it has been trained on large amount of samples prepared with different procedures.




Al segmentation results

The results of AI segmentation on various sample without any further adjustments:

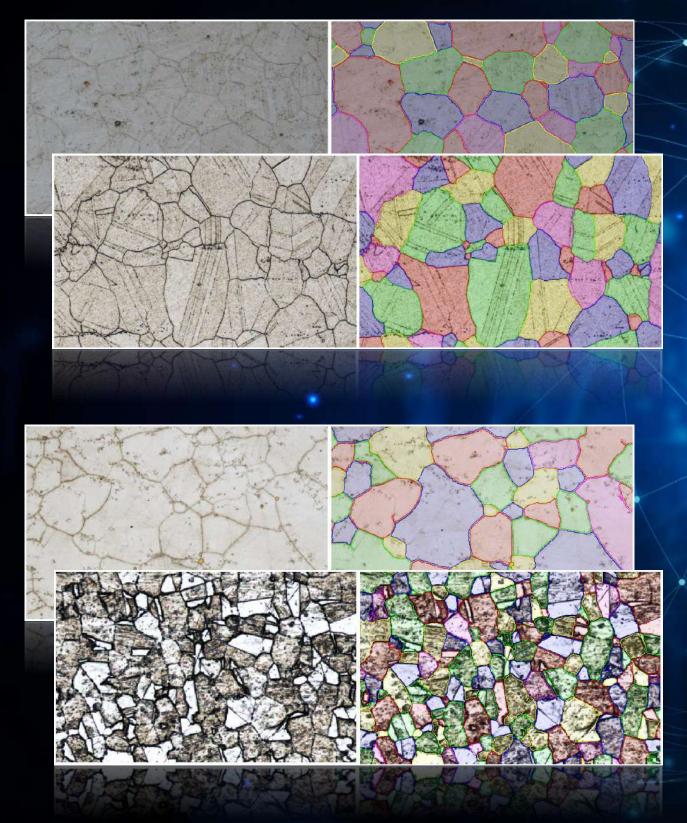



Al segmentation results

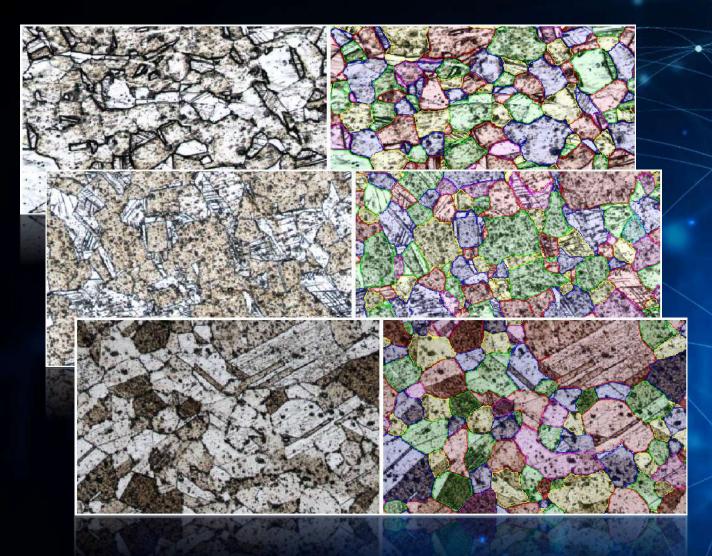

Reliable AI grain detection currently works primarily on Austenitic and Ferritic one-phase structures.

Additional image samples are being continually added into the AI network to offer customers the best and the most comfortable grain segmentation on the market.

All mask segmentation results on images in this brochure have been created purely by our AI and have not been further altered or adjusted in any way.


Elements

Advanced features

Brilliant capabilities of AI provide accurate grain detection in NIS-Elements even on images containing various segmentation difficulties. For example:

Annealing twins


Al's unparalleled ability to detect grains containing annealing twins decisively surpasses conventional segmentation methods.

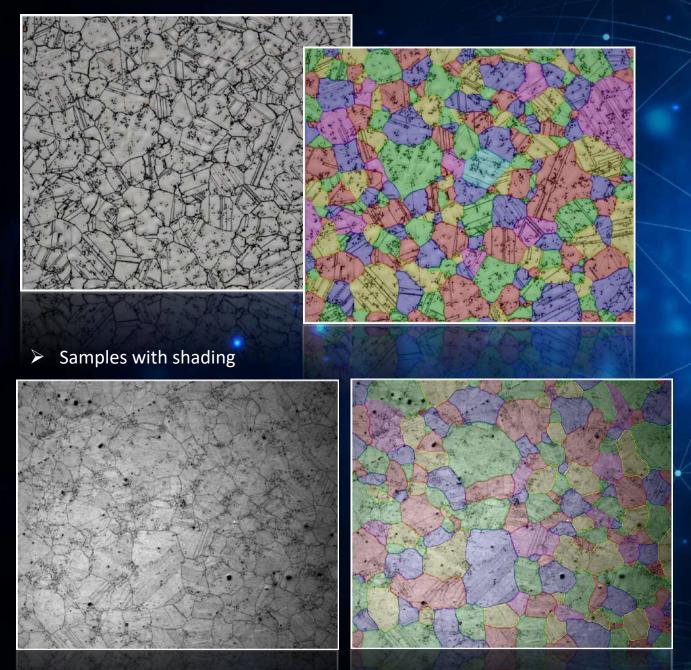


Al network is trained to correctly identify individual grains also on the images with shading. Achieving such excellent results is very difficult using common segmentation methods.



Samples containing particles



Grain detection using AI in NIS-Elements properly segments grains on images containing various interfering particles or defects.

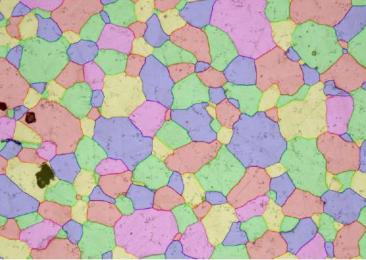

Scratched samples



Al capabilities can automatically and correctly segment grains even on scratched or similarly damaged samples.

And

Elements

NIS

Already pretrained for you

Detection ×		×	>
Phase 1	2 ? Name Austenite	Austenite Ai Color	
Save as, Detection typ	Properties	5 Delete	
Ai	~		
Ai Detection			•
Fine gra			
		Save Cance	


And the best part? Grain Size AI detection in NIS-Elements comes already ready to use! Simply click and the AI detection will do the work for you all by itself.

Customize your own Al

Do you have samples you would like to achieve better results on? Create your own custom AI for specific samples using the NIS-Elements NIS.ai module to get the best results possible.



Automatic complete grain size results with just one-click

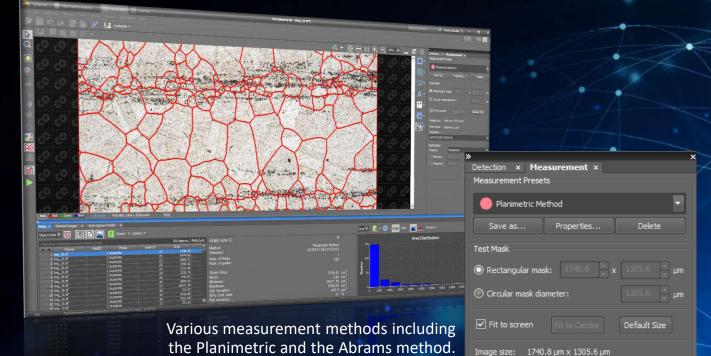

In accordance with: ASTM E1382-97 and E112-13

MS Elements		Grain Size Report		
Submitter:	LIM			
Teat	Standard A-23			
Product:	Testing Sample	Sample No.:	12	
Material:	Austonite	Order No.:	1	
Submitted for test:	25.04.2023	Charge No.:	C-2317	
Tested:	25.04.2023	Drawing No.:	6	
Standard		ASTM E112-13(2013	3)	
Test Method		Planimetric		
Number of measured I	fields:	10		
	Measu	ared Table:		
		Austenite		
N		1874.500		
A SD (µm*2)		80,955		
95% IS A (µm*2)		2.827		
A MEAN [um/2]		138,080		
A RA (%)		2.048		
Grain size number		10		
Original Image:		Analyzed Image:		

JIS G0551 ISO 643 GB/T 6394

Complete measurement results in Report including the number of measured fields or images, the number of grains and the grain area (mean, minimum and maximum) using NIS-Elements

Mask area: 2272788.5 µm

EgDiameter

ASTM E112-13(2013)

Standard

Restrictions


Feature:

We would like to express our gratitude to UJP PRAHA a.s., Nad Kamínkou 1345, Prague 5 Zbraslav, Czech republic, for providing us a wide variety of samples for the AI development and kind approval to use them in our Grain Size brochure and presentations.

The company name, logos and company symbols of Nikon and NIS-Elements in this brochure are registered trademarks of NIKON CORPORATION.



Products required for this application

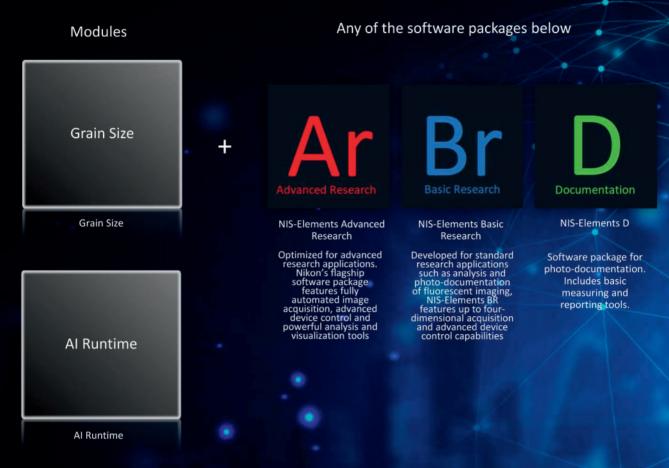

Contact us

For more information about our solutions, please contact your local Nikon representative at

www.industry.nikon.com



T.: 210 72.43.529 - 6979 64.23.95 email: info@apples.com.gr site: www.apples.com.gr

